Two people required to assemble the **COMPONENTS:** Rapid Racking Manutan product. В В 900 MM / 1200MM 1500 MM 5x *₹apid*₹acking 5x **₹apid**₹acking 8x Locate bottom RECOMMENDATION: level in holes 3+4. NB - all bays must have a bottom level. Press the crossbeam against the upright. G В \triangle **₹apid**₹acking DON'T MISS THIS STEP! OPTION 2





RAPID 3


900 -1500 mm wide



| Height | Width | Depth | |
|-----------|----------|--------|--|
| 1,800 mm | 900 mm | 450 mm | |
| Levels | 1,200 mm | 600 mm | |
| 5 shelves | 1,500 mm | | |





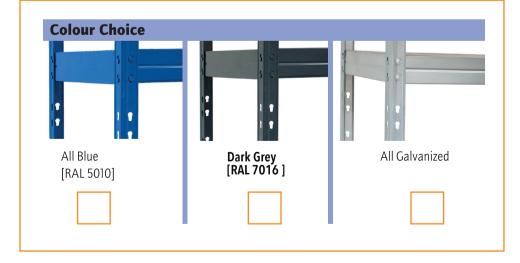

| Beam Length | 5 shelves |
|-------------|-----------|
| 900mm | 250 kg |
| 1,200mm | 250 kg |
| 1,500mm | 250 kg |



